V7 Cables
manufactured by Belkin

V7 CAT5E Patch Cables UTP (Unshielded Twisted Pair)

0.5 m	V7-C5U-50CM-GYS J150570	V7-C5U-50CM-BLS J150571	V7-C5U-50CM-GRS J150572	V7-C5U-50CM-BKS J150573	V7-C5U-50CM-RDS J150574	V7-C5U-50CM-WHS J150759	V7-C5U-50CM-YLS J150771	
1 m	V7-C5U-01M-GYS J150575	V7-C5U-01M-BLS J150576	V7-C5U-01M-GRS J150577	V7-C5U-01M-BKS J150578	V7-C5U-01M-RDS J150579	V7-C5U-01M-WHS J150779	V7-C5U-01M-YLS J150786	
2 m	V7-C5U-02M-GYS J150580	V7-C5U-02M-BLS J150581	V7-C5U-02M-GRS J150582	V7-C5U-02M-BKS J150583	V7-C5U-02M-RDS J150584	V7-C5U-02M-WHS J150787	V7-C5U-02M-YLS J150770	V7-C5U-02M-ORS J150797
3 m	V7-C5U-03M-GYS J150585	V7-C5U-03M-BLS J150586	V7-C5U-03M-GRS J150587	V7-C5U-03M-BKS J150588	V7-C5U-03M-RDS J150589	V7-C5U-03M-WHS J150788	V7-C5U-03M-YLS J150780	
5 m	V7-C5U-05M-GYS J150590	V7-C5U-05M-BL J150591	V7-C5U-05M-GRS J150592	V7-C5U-05M-BKS J150593	V7-C5U-05M-RDS J150594	V7-C5U-05M-WHS J150783	V7-C5U-05M-YLS J150758	
10 m	V7-C5U-10M-GYS J1505595	V7-C5U-10M-BLS J150596	V7-C5U-10M-GRS J150597	V7-C5U-10M-BKS J150598	V7-C5U-10M-RDS J150599	V7-C5U-10M-WHS J150784	V7-C5U-10M-YLS J150781	
15 m	V7-C5U-15M-GYS J150789					V7-C5U-15M-WHS J150789		
30 m	V7-C5U-30M-GYS J150790	V7-C5U-30M-BLS J150785				V7-C5U-30M-WHS J150799		

Unshielded twisted pair cable

V7 CAT5E Patch Cables STP (Shielded Twisted Pair)

0.5 m	V7-C5S-50CM-GYS J150769	V7-C5S-50CM-BLS J150764	V7-C5S-50CM-BKS J150755
1 m	V7-C5S-01M-GYS J150774	V7-C5S-01M-BLS J150761	
2 m	V7-C5S-02M-GYS J150767	V7-C5S-02M-BLS J150775	
3 m	V7-C5S-03M-GYS J150762	V7-C5S-03M-BLS J150754	
5 m	V7-C5S-05M-GYS J150763	V7-C5S-05M-BLS J150776	
10 m	V7-C5S-10M-GYS J150777	V7-C5S-10M-BLS J150756	
15 m	V7-C5S-15M-GYS J150757	V7-C5S-15M-BLS J150768	V7-C5U-15M-BKS J150778

Shielded twisted pair cable

V7 CAT5E Patch Cables FSTP (Foil Shielded Twisted Pair)

1 m	V7-C5F-01M-GYS J150773
2 m	V7-C5F-02M-GYS J150765
3 m	V7-C5F-03M-GYS J150760
5 m	V7-C5F-05M-GYS J150766

Foil shielded twisted pair cable

V7 FCAT5E Patch Cables UTP (Unshielded Twisted Pair)

2 m	V7-FC5U-02M-BLS J150809
10 m	V7-FC5U-10M-BLS J150810

V7 CAT5E cables are used to connect all the hardware destinations in a Local Area Network (LAN). They are perfect for use with 10/100 Base - T networks. Connect your IT hardware to the network and offer reliable, practical, Gigabit-Ethernet performance. V7 CAT5e cables are available in various colors and lengths.

Features

- Compliant to industry standards - ETL-verified to TIA/EIA 568B and ISO/IEC 11801-compliant
- Performance tested, tested to exceed: 100MHZ
- Molded, snagless connectors
- UTP (Unshielded Twisted Pair) or STP (Shielded Twisted Pair) technology
- Stranded, 24AWG, copper conductors

The data in this publication is for illustration purposes only and does not necessarily represent standards or specifications which must be met by V7. Design and specifications are subject to change without prior notice. Trademarks belong to their respective owners. No responsibility assumed and all liability for damages resulting from use of this information or for any errors or omissions, are disclaimed. Measurement standards and testing conditions, as per manufacturer definitions, are available on request. Issue: 03/2009

V7 Cables
manufactured by Belkin

V7 CAT6E Patch Cables UTP (Unshielded Twisted Pair)

Unshielded twisted pair cable

0.5 m	V7-C6U-50CM-GYS J150630	V7-C6U-50CM-BLS J150631	V7-C6U-50CM-GRS J150632	V7-C6U-50CM-BKS J150633	V7-C6U-50CM-RDS J150634	V7-C6U-50CM-WHS J150811
1 m	V7-C6U-01M-GYS J150635	V7-C6U-01M-BLS J150636	V7-C6U-01M-GRS J150637	V7-C6U-01M-BKS J150638	V7-C6U-01M-RDS J150639	V7-C6U-01M-WHS J150794
2 m	V7-C6U-02M-GYS J150640	V7-C6U-02M-BLS J150641	V7-C6U-02M-GRS J150642	V7-C6U-02M-BKS J150643	V7-C6U-02M-RDS J150644	V7-C6U-02M-WHS J150795
3 m	V7-C6U-03M-GYS J150645	V7-C6U-03M-BLS J150646	V7-C6U-03M-GRS J150647	V7-C6U-03M-BKS J150648	V7-C6U-03M-RDS J150649	V7-C6U-03M-WHS J150796
5 m	V7-C6U-05M-GYS J150650	V7-C6U-05M-BLS J150651	V7-C6U-05M-GRS J150652	V7-C6U-05M-BKS J150653	V7-C6U-05M-RDS J150654	V7-C6U-05M-WHS J150772
10 m	V7-C6U-10M-GYS J150656	V7-C6U-10M-BLS J150657	V7-C6U-10M-GRS J150658	V7-C6U-10M-BKS J150659	V7-C6U-10M-RDS J150660	V7-C6U-10M-WHS J150803

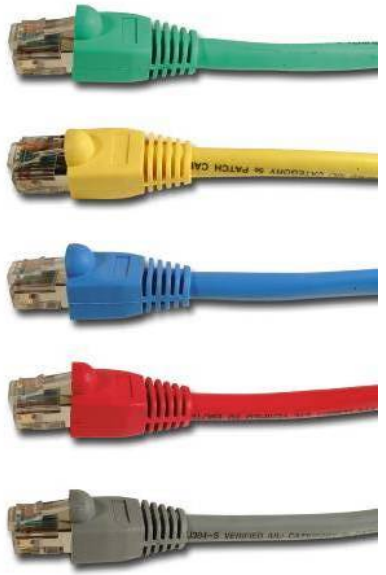

Shielded twisted pair cable

V7 CAT6E Patch Cables STP (Shielded Twisted Pair)

0.5 m	V7-C6S-50CM-GYS J150600	V7-C6S-50CM-BLS J150601	V7-C6S-50CM-GRS J150602	V7-C6S-50CM-BKS J150603	V7-C6S-50CM-RDS J150604
1 m	V7-C6S-01M-GYS J150605	V7-C6S-01M-BLS J150606	V7-C6S-01M-GRS J150607	V7-C6S-01M-BKS J150608	V7-C6S-01M-RDS J150609
2 m	V7-C6S-02M-GYS J150610	V7-C6S-02M-BLS J150611	V7-C6S-02M-GRS J150612	V7-C6S-02M-BKS J150613	V7-C6S-02M-RDS 150614
3 m	V7-C6S-03M-GYS J150615	V7-C6S-03M-BLS J150616	V7-C6S-03M-GRS J150617	V7-C6S-03M-BKS J150618	V7-C6S-03M-RDS J150619
5 m	V7-C6S-05M-GYS J150620	V7-C6S-05M-BLS J150621	V7-C6S-05M-GRS J150622	V7-C6S-05M-BKS J150623	V7-C6S-05M-RDS J150624
10 m	V7-C6S-10M-GYS J150625	V7-C6S-10M-BLS J150626	V7-C6S-10M-GRS J150627	V7-C6S-10M-BKS J150628	V7-C6S-10M-RDS J150629

V7 CAT5E Patch Cables CROSSOVER

1 m	V7-C5X-01M-YLGS J150792	
2 m	V7-C5X-02M-YLGS J150782	
3 m	V7-C5X-03M-YLGS J150801	V7-C5X-03M-GYLS J150800
5 m	V7-C5X-05M-YLGS J150793	
10 m		V7-C5X-10M-GYLS J150802
15 m		V7-C5X-15M-GYLS J150791

V7 CAT6E cables are used to maximize your network speed with higher bandwidth - perfect for VoIP, video, and file transfers. CAT6 cables improve transmission performance, have superior immunity from external noise, fewer retransmissions, and fewer lost packets. V7 CAT6 cables are available in various colors and lengths.

Features

- Compliant to industry standards - ETL-verified to TIA/EIA 568B.2.1 and ISO/IEC 11801-compliant
- Performance tested, tested to exceed: 500MHZ
- Molded, snagless connectors
- UTP (Unshielded Twisted Pair) or STP (Shielded Twisted Pair) technology
- Stranded, 24AWG, copper conductors

The data in this publication is for illustration purposes only and does not necessarily represent standards or specifications which must be met by V7. Design and specifications are subject to change without prior notice. Trademarks belong to their respective owners. No responsibility assumed and all liability for damages resulting from use of this information or for any errors or omissions, are disclaimed. Measurement standards and testing conditions, as per manufacturer definitions, are available on request. Issue: 03/2009